
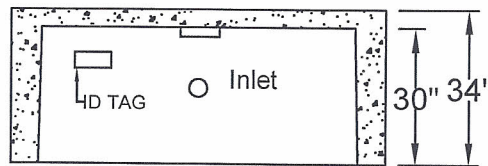
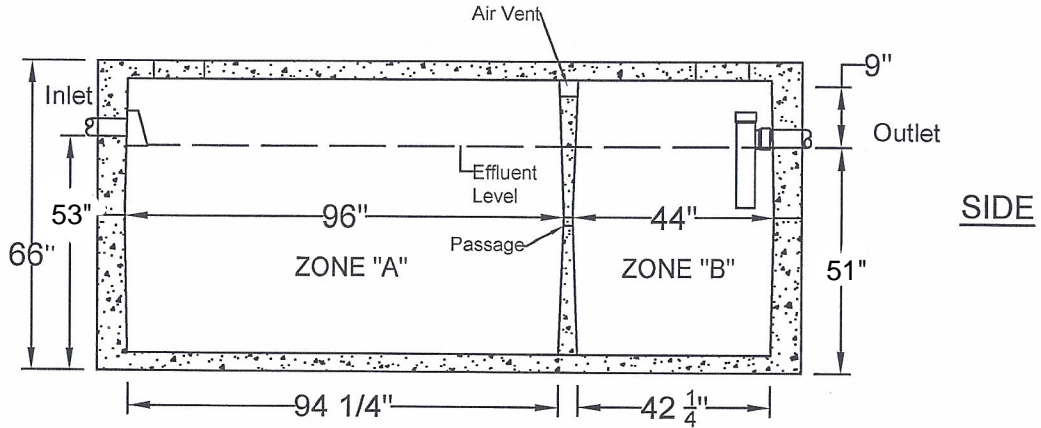



SCIOTO VALLEY PRECAST COMPANY

3218 S. BRIDGE STREET CHILLICOTHE, OH 45601 PHONE (740) 663-2659

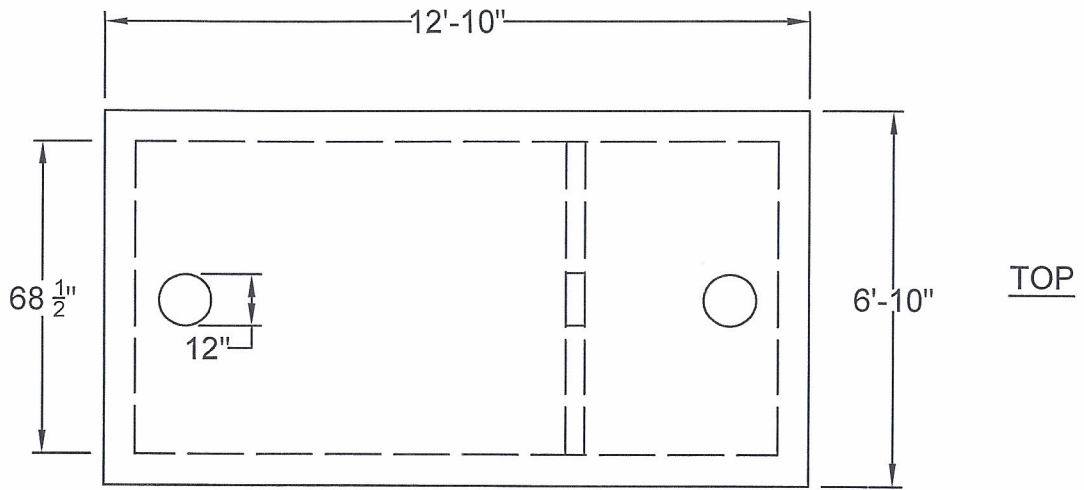

Concrete 5000 PSI @ 28 Days
 All Dimensions in Inches
 Max cover on top of tank 48"
 Inlet/Outlet boots for 4" pipe
 Boots: Meet ASTM C923
 Sealant: Meets ASTM C990
 Outlet Filter: Meets ANSI/NSF 46

Field Assembled

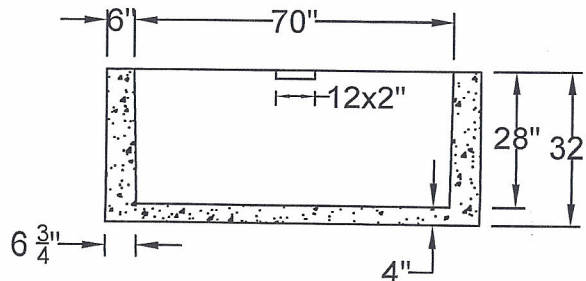

EXCAVATION SIZE 8'-0" X 14'-0"
 TANK WEIGHT 10800 Lbs / 1/2 section

1-1-16

2000 GALLON SEPTIC TANK