


SCIOTO VALLEY PRECAST COMPANY

3218 S. BRIDGE STREET CHILLICOTHE, OHIO 45601

PHONE (740) 663-2659

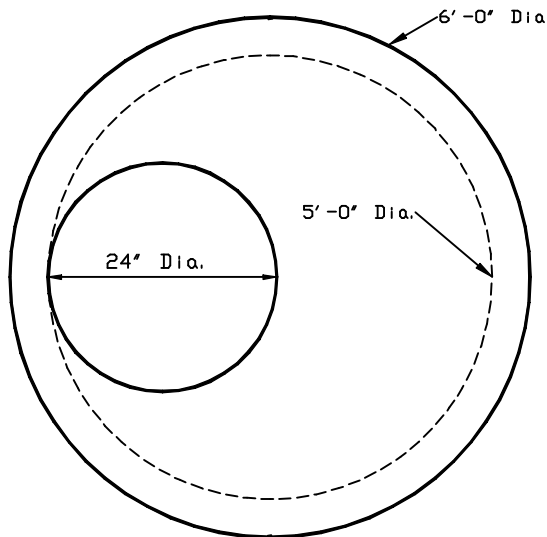

SPECIFICATIONS

REINFORCING SHALL CONFORM TO A. S. T. M. DESIGNATION C-478 PRECAST, REINFORCED, CONCRETE SECTIONS.

JOINTS TO CONFORM TO AASHTO M198

- A) Rubber Gasket
- Or
- B) Flexible Plastic Gaskets

STEPS SHALL BE MA INDUSTRIES PS1-PF INSTALLED 12" ON CENTERS.

NOTES


JOINT GASKET SHALL BE BY HAMILTON-KENT RUBBER GASKET ASTM C-443 AND C-361 SECTIONS.

JOINT SEALANT- CONSEAL BY CONCRETE SEALANTS


PIPE GASKET TO BE
 A-LOCK x CEL
 OR
 A-LOK G3 BOOT
 OR
 NPC KOR-N-SEAL I OR II
 FLEXIBLE BOOT

PRECAST FLOW CHANNEL AVAILABLE

INSIDE DROP BY RECLINER AVAILABLE

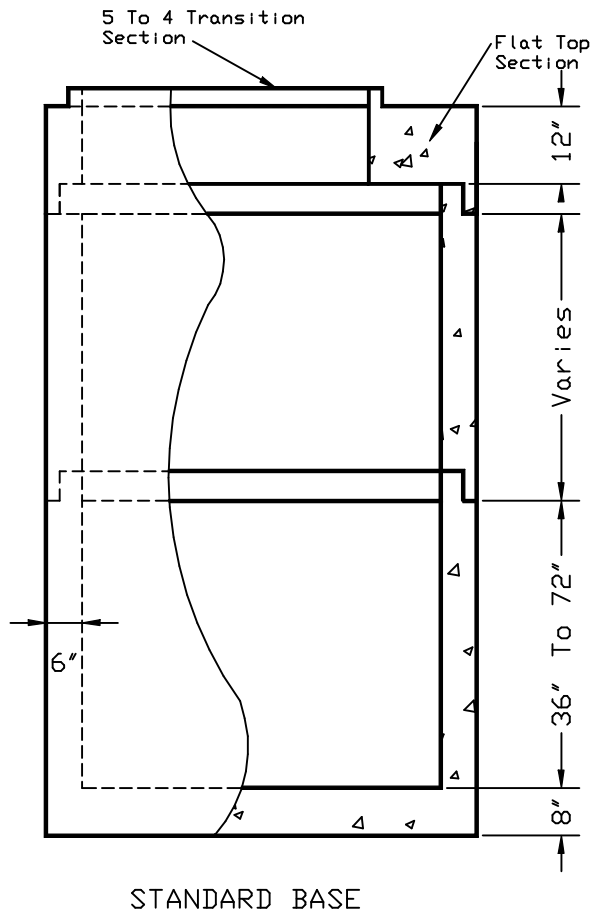

STANDARD BASE

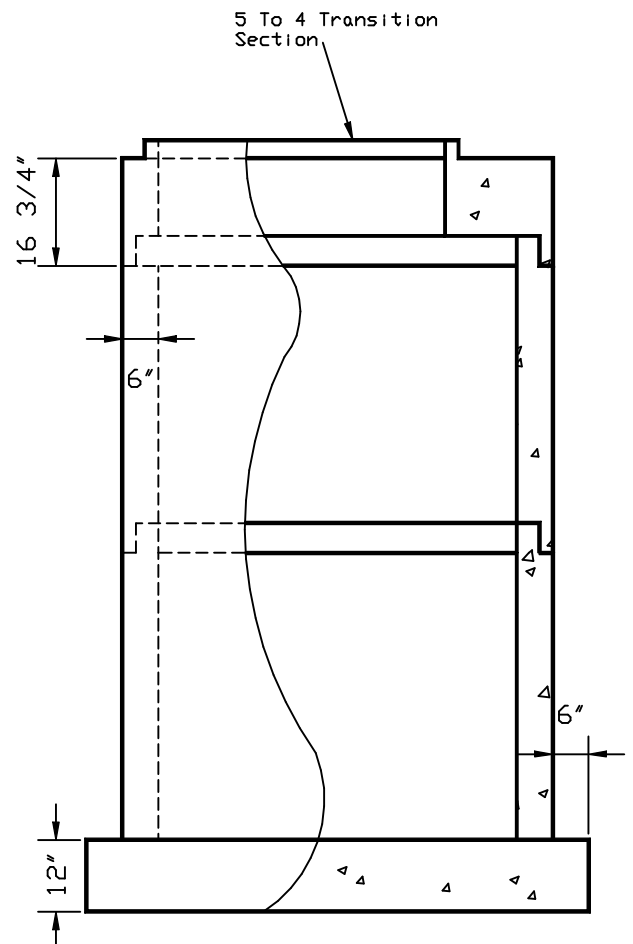

FLOATATION BASE

60" STANDARD MANHOLE